



epd-norge.no
The Norwegian EPD Foundation

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	Metacon AS
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-1914-839-EN
Registration number:	NEPD-1914-839-EN
ECO Platform reference number:	-
Issue date:	04.11.2019
Valid to:	04.11.2024

H-I-U-T-L-profiler (I, H, U, L, T and wide flats hot-rolled sections)

Metacon AS
www.epd-norge.no

Metacon



General information

Product:

H-I-U-T-L-profiler
(I, H, U, L, T and wide flats hot-rolled sections)

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: (+47) 97722020
e-mail: post@epd-norge.no

Declaration number:

NEPD-1914-839-EN

ECO Platform reference number:

This declaration is based on Product Category Rules:

CEN Standard EN 15804 serves as core PCR
NPCR Part A
NPCR 013
NPCR 013 Part B

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

Per 1kg steel from cradle to gate

Declared unit with options (A1-A4, C1-C4, D):

Per 1 kg steel from cradle to gate

Functional unit:

Not relevant for cradle-to-gate

Verification:

The CEN Norm EN 15804 serves as the core PCR. Independent verification of the declaration and data, according to ISO14025:2010

internal external

Third party verifier:



Lars G. F. Tellnes, Ostfold Research
Independent verifier approved by EPD Norway

Owner of the declaration:

Metacon AS
Contact person: Henning Klausen
Phone: +47 69 22 44 11
e-mail: firmapost@metacon.no

Manufacturer:

Metacon AS
Bredmyra 4, 1739 Borgenhaugen
Phone: +47 69 22 44 11
e-mail: firmapost@metacon.no

Place of production:

Raw material supply from European steel mills
Manufacturing in Norway

Management system:

Organisation no:

994 925 954 MVA

Issue date:

04.11.2019

Valid to:

04.11.2024

Year of study:

2019

Comparability:


EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

The EPD has been worked out by:

Michael M. Jenssen, Asplan Viak

Approved



Håkon Hauan
Managing Director of EPD-Norway

Product

Product description:

I, H, U, L, T and wide flats sections are made of hot-rolled sections used in building frame structures.

Technical data:

Dimensions: IPE 80-600, HEA/B/M 100-600, UNP/UPE 80-400, L 40-200, L 65x50 -200x150, T 30-140 and wide steels:160-500, t=5-40. Steel grade ≤ S355. EN 10025 and EN1090-2 standards are applied.

Product specification:

Product composition:

Materials	kg	%
Alloyed steel	0,99	99 %
Paints	0,01	1 %

Market:

Norway

Reference service life, product:

Not relevant for cradle to gate

Reference service life, building:

Not relevant for cradle to gate

LCA: Calculation rules

Declared unit:

Per 1 kg steel from cradle to gate

System boundary:

Cradle to gate with options (A1-A4, C1-C4, D):

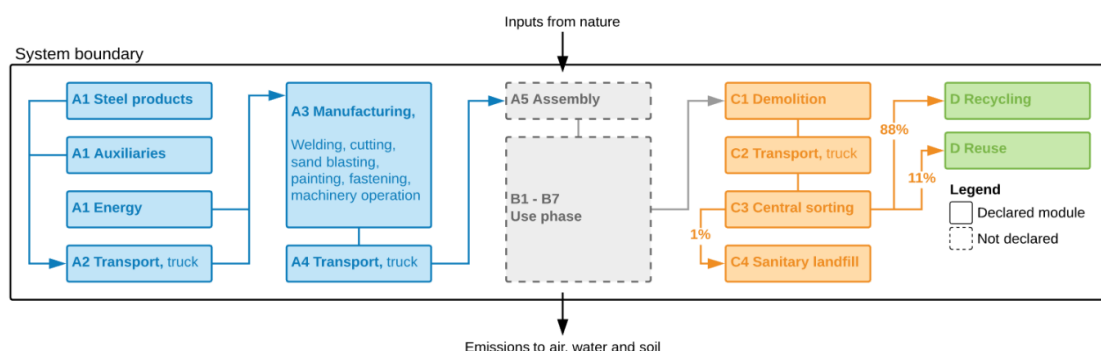


Figure 1: Flowchart showing the system boundaries.

Data quality:

General requirements and guidelines concerning the use of generic and specific data and the quality of those are as described in EN 15804: 2012+A1:2013, clause 6.3.6 and 6.3.7. The data is representative according to temporal, geographical and technological requirements. Databases used have been ecoinvent v3.4 and supplier's EPD (EPD-ARM-20180070-IBD1-EN). Calculations have been carried out using Simapro v8.5.

Temporal:

Data for use in module A3 is supplied by the manufacturer and consists of recorded and calculated amounts of specific material and energy consumption for the site. Specific data has been collected for 2018. Generic data has been created or updated within the last 10 years. Any exceptions are documented in the LCA-report.

Geographical:

The product included in this EPD is manufactured in Norway and is representative for the Norwegian market. Best available approximations are used where Norwegian-specific data are unavailable.

Technological:

Data represents technology in use

Cut-off criteria:

All major raw materials and all the essential energy is included. The production process for raw materials and energy flows that are included with very small amounts (<1%) are not included. This cut-off rule does not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Input flows, wastes and emissions are allocated equally among all products through mass allocation.

Benefits and loads beyond the system boundary (module D):

Module D is calculated as net scrap * LCI for scrap, where the scrap LCI is calculated as the credit for avoided primary production of steel, minus the burden of recycling steel scrap to make new steel, multiplied by the process yield (>1kg scrap is needed to make 1kg new steel). LCI for scrap has been provided by worldsteel (Eurofer, 2019; Worldsteel, 2017).

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transportation scenarios

Transport in A2 describes the transport of steel products from Europe, via a nearby supplier, to Metacon at Rakkestad.

Transportation scenarios for waste are based on the recorded distance to the waste management company used. Distances to final waste handling provided by Avfall Norge (Raadal et al., 2009).

Distance to building site according to NPCR 013 Part B. For an estimation of impacts from distances to site other than the one provided in A4, please use the transport calculator provided by Østfoldforskning AS on behalf of EPD-Norway. It can be found here: <https://lca.no/transportkalkulator/>

Capacity utilization has been calculated by dividing the average load by the maximum load as they are reported in ecoinvent v3.4. Fuel consumption as given in ecoinvent v3.4. Load factor as reported by ecoinvent.

End of life scenario

A 99% recovery rate is provided by the supplier; 88% to recycling, 11% to reuse, leaving 1% to landfilling (EPD-ARM-20170033-IBD1-EN).

Transportation scenarios

Type	Module	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit
Truck	A4	44	Lorry >32t EURO5	300	0,022	l/tkm
Waste collection	C2	50	Lorry 21t	19	0,391	l/tkm
Truck	C2	26	Lorry 7,5-16t EURO5	278	0,044	l/tkm

End of Life (C1, C3, C4)

	Unit	Value
Hazardous waste disposed	kg	0
Collected as mixed construction waste	kg	0
Reuse	kg	0,11
Recycling	kg	0,88
Energy recovery	kg	0
To landfill	kg	0,01

Benefits and loads beyond the system boundaries (D)

	Unit	Value
Net new scrap	kg	0,134

System boundaries (X=included, MND= module not declared, MNR=module not relevant)

Product stage			Assembly stage		Use stage								End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery- Recycling-potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X	

Environmental impact

Parameter	Unit	A1-A3	A4	C1	C2	C3	C4	D
GWP	kg CO ₂ -eqv	1,04E+00	2,59E-02	2,15E-02	6,86E-02	2,19E-04	5,30E-05	1,78E-01
ODP	kg CFC11-eqv	5,97E-08	5,11E-09	3,87E-09	1,23E-08	2,61E-11	1,77E-11	-2,48E-13
POCP	kg C ₂ H ₄ -eqv	5,91E-04	4,13E-06	4,30E-06	1,14E-05	5,97E-08	1,94E-08	9,52E-05
AP	kg SO ₂ -eqv	4,33E-03	8,37E-05	1,63E-04	2,47E-04	1,25E-06	3,95E-07	2,75E-04
EP	kg PO ₄ ³⁻ -eqv	7,30E-04	1,42E-05	3,51E-05	4,63E-05	2,73E-07	6,81E-08	1,60E-05
ADPM	kg Sb-eqv	6,13E-06	5,06E-08	7,21E-09	1,54E-07	2,15E-09	6,10E-11	3,88E-06
ADPE	MJ	1,47E+01	4,08E-01	3,09E-01	9,89E-01	2,91E-03	1,51E-03	1,57E+00

GWP Global warming potential; **ODP** Depletion potential of the stratospheric ozone layer; **POCP** Formation potential of tropospheric photochemical oxidants; **AP** Acidification potential of land and water; **EP** Eutrophication potential; **ADPM** Abiotic depletion potential for non fossil resources; **ADPE** Abiotic depletion potential for fossil resources

Resource use

Parameter	Unit	A1-A3	A4	C1	C2	C3	C4	D
RPEE	MJ	1,92E+00	6,51E-03	1,66E-03	1,02E-02	1,51E-02	2,80E-05	-3,39E-01
RPEM	MJ	1,38E-14	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
TPE	MJ	1,92E+00	6,51E-03	1,66E-03	1,02E-02	1,51E-02	2,80E-05	-3,39E-01
NRPE	MJ	1,75E+01	4,20E-01	3,12E-01	1,01E+00	3,78E-03	1,54E-03	1,21E+00
NRPM	MJ	3,73E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
TRPE	MJ	1,79E+01	4,20E-01	3,12E-01	1,01E+00	3,78E-03	1,54E-03	1,21E+00
SM	kg	9,46E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
W	m ³	1,98E-02	8,91E-05	4,22E-05	4,22E-05	4,22E-05	1,69E-06	-1,22E-04

RPEE Renewable primary energy resources used as energy carrier; **RPEM** Renewable primary energy resources used as raw materials; **TPE** Total use of renewable primary energy resources; **NRPE** Non renewable primary energy resources used as energy carrier; **NRPM** Non renewable primary energy resources used as materials; **TRPE** Total use of non renewable primary energy resources; **SM** Use of secondary materials; **RSF** Use of renewable secondary fuels; **NRSF** Use of non renewable secondary fuels; **W** Use of net fresh water

End of life - Waste

Parameter	Unit	A1-A3	A4	C1	C2	C3	C4	D
HW	kg	1,22E-03	2,13E-07	1,39E-07	5,10E-07	5,54E-09	1,08E-09	2,67E-07
NHW	kg	2,77E-01	3,66E-02	3,40E-04	3,46E-02	1,05E-04	1,00E-02	-2,56E-02
RW	kg	5,46E-04	2,95E-06	2,17E-06	7,01E-06	2,12E-08	9,96E-09	-1,07E-04

HW Hazardous waste disposed; **NHW** Non hazardous waste disposed; **RW** Radioactive waste disposed

End of life - Output flow

Parameter	Unit	A1-A3	A4	C1	C2	C3	C4	D
CR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,10E-01	0,00E+00	0,00E+00
MR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,80E-01	0,00E+00	0,00E+00
MER	kg	7,39E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	5,71E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ETE	MJ	4,65E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

CR Components for reuse; **MR** Materials for recycling; **MER** Materials for energy recovery; **EEE** Exported electric energy; **ETE** Exported thermal energy

Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009

Additional Norwegian requirements

Greenhouse gas emission from the use of electricity in the manufacturing phase

The electricity mix used in the manufacturing stage (A3) is specific to Norwegian electricity production and imports, transformed to medium voltage (including the transmission network; direct emissions to air; electricity losses during transmission). Reference year: 2014.

Data source	Amount	Unit
ecoinvent v3.4	0,0276	kg CO ₂ -eqv/kWh

Dangerous substances

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list.¹
- The product contains substances given by the REACH Candidate list or the Norwegian priority list that are less than 0,1 % by weight.
- The product contain dangerous substances, more then 0,1% by weight, given by the REACH Candidate List or the Norwegian Priority list, see table.
- The product contains no substances given by the REACH Candidate list or the Norwegian priority list. The product is classified as hazardous waste (Avfallsforskiten, Annex III), see table.

¹No substances as given by REACH are used or have been added to the production

Indoor environment





No tests have been carried out on the product concerning indoor climate.

Carbon footprint

Carbon footprint has not been worked out for the product.

Bibliography

EN 15804:2012+A1:2013	<i>Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products</i>
Eurofer (2019)	<i>Personal communication, w/ Nicholas Avery, email, 21.02.2019.</i>
EPD-ARM-20180070-IBD1-EN	<i>Structural Steel Sections from Electric Arc Furnaces - ArcelorMittal</i>
EN 1090-2:2018	<i>Execution of steel structures and aluminium structures - Part 2: Technical requirements for steel structures</i>
ISO 14025:2010	<i>Environmental labels and declarations - Type III environmental declarations - Principles and procedures</i>
ISO 14025:2010	<i>Environmental labels and declarations - Type III environmental declarations - Principles and procedures</i>
ISO 14044:2006	<i>Environmental management - Life cycle assessment - Requirements and guidelines</i>
ISO 21930:2007	<i>Sustainability in building construction - Environmental declaration of building products</i>
Jenssen, M. M. (2019)	<i>LCA-rapport, Metacon AS: Stålkomponenter</i>
NPCR 013rev1 (2013)	<i>Product Category Rules Steel as Construction Material</i>
NPCR Part A (2017)	<i>Construction products and services</i>
NPCR 013 Part B (2019)	<i>Part B for Steel and aluminium construction products (NOTE: under development as this EPD was developed)</i>
Raadal et al. (2009)	<i>Klimaregnskap for avfallshåndtering. Fase I og II: Glassemballasje, metalemballasje, papir, papp, plastemballasje, våtorganisk avfall, treavfall og restavfall fra husholdninger. Avfall Norge–Rapport 5/2009</i>
Worldsteel (2017)	<i>World Steel Association Life Cycle Inventory Methodology Report, Brussels: World Steel Association</i>

 epd-norge.no The Norwegian EPD Foundation	Program operator The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	Phone: +47 97722020 e-mail: post@epd-norge.no web: www.epd-norge.no
 epd-norge.no The Norwegian EPD Foundation	Publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	Phone: +47 97722020 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration Metacon AS Bredmyra 4, 1739 Borgenhaugen Norway	Phone: +47 69 22 44 11 Fax e-mail: firmapost@metacon.no web: www.metacon.no
	Author of the Life Cycle Assessment Asplan Viak AS Michael Myrvold Jenssen Abels gate 9 7030 Trondheim	Phone: +47 41 79 94 17 e-mail: michael.jenssen@asplanviak.no web: www.asplanviak.no