

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	Moelven Modus AS
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-2146-972-EN
Registration number:	NEPD-2146-972-EN
ECO Platform reference number:	-
Issue date:	23.04.2020
Valid to:	23.04.2025

Uni Wall room partition system (UniWall 98 mm)

Moelven Modus AS



www.epd-norge.no



General information

Product:

Uni Wall room partition system (UniWall 98 mm)

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo
Phone: +47 97722020
e-mail: post@epd-norge.no

Declaration number:

NEPD-2146-972-EN

ECO Platform reference number:**This declaration is based on Product Category Rules:**

CEN Standard EN 15804 serves as core PCR
PCR for room partition systems, v. 1.2, by the Institut Bauen
und Umwelt. Date of PCR version 1.7: 8.1.2019

Statement of liability:

The owner of the declaration shall be liable for the
underlying information and evidence. EPD Norway shall
not be liable with respect to manufacturer information, life
cycle assessment data and evidences.

Declared unit:

1 m² of the fullwall element of the Uni Wall partition
system, including the associated fixing components and
sealants at the interfaces with the stationary wall, floor and
ceiling.

Functional unit:

Providing room partition and acoustic insulation on 1 m² with
an acoustic resistance of 40 Rw dB and with a reference
service life of 60 years.

Verification:

The CEN Norm EN 15804 serves as the core PCR.
Independent verification of the declaration and data,
according to ISO14025:2010

internal external

Third party verifier:



PhD Andreas Brekke, Ostfold Research
(Independent verifier approved by EPD Norway)

Owner of the declaration:

Moelven Modus AS/AB
Contact person: Kjetil Prytz
Phone: +47 480 45 261
e-mail: kjetil.prytz@moelven.no

Manufacturer:

Moelven Modus AS
Postboks 63, 2051 Jessheim, Norge
Phone: +47 06050
e-mail: post.modus@moelven.no

Place of production:

Jessheim (Norway), Kumla (Sweden)

Management system:

According to ISO 9001
According to ISO 14001

Organisation no:

951 269 778

Issue date:

23.04.2020

Valid to:

23.04.2025

Year of study:

<XXXX>

Comparability:


EPD of construction products may not be comparable if they
not comply with EN 15804 and seen in a building context.

The EPD has been worked out by:

Isak Eklöv & Andreas Asker



Approved

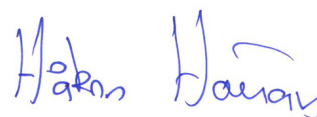

Håkon Hauan
Managing Director of EPD-Norway

Product

Product description:

This EPD refers to Uni Wall 98 mm. Uni Wall is built as a modular system where the joint between modules is a discreet v-joint. This gives the wall a traditional and sober appearance. The design of the partition wall makes it easy to disassemble, move and put together again without breaking any parts. Thus, during its lifetime the UniWall can be moved several times to conform with changes in the indoor layout of the building.

Product specification:

The frame is constructed of steel and is lined with coated and painted plasterboards. Only the visible steel parts are paint coated. Plasterboards can be coated with two alternative materials, vinyl wallpaper or weaved fiberglass fabric.

Materials	kg	Share
Plasteboards, whereof:	16.2	79 %
<i>Gypsum</i>	15.5	76 %
<i>Cardboard</i>	0.6	3 %
<i>Additives</i>	0.1	0 %
Steel, zinc/paint coated	2.68	13 %
Paint	0.36	2 %
Insulation	0.57	3 %
Glue	0.26	1 %
Wallpaper	0.12	1 %
Screw	0.21	1 %
Sealing strip	0.09	0.4%
Sum	20.49	100 %

Technical data:

Dimensions and weight of a standard module:

Width:	3 600 mm
Height:	2 700 mm
Thickness:	98 mm
Area:	9,72 m ²
Weight:	199 kg

Sound insulation index R in [dB] = 40 dB. Documentation from performed sound resistance tests, self-declared by Moelven Modus, is presented in appendix 6 of the background report, LCA-report Sweco 2020-1.

Market:

Nordic

Reference service life, product:

60 years

LCA: Calculation rules

Functional unit:

Providing room partition and acoustic insulation on 1 m² with an acoustic resistance of 40 Rw dB and with a reference service life of 60 years.

System boundary:

Cradle to Grave - the following stages have been declared: A1-3, A4-5, B1, B5-B7, C1-4. See flowsheet on the right.

Cut-off criteria:


All major raw materials and all the essential energy is included. No materials have been excluded.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Principally allocation is avoided by subdivision of included processes. When subdivision is no option, incoming energy and material flows are allocated among all products made in the given process through mass allocation. Moelven's production in Sweden and Norway include the same activities and require basically corresponding energy and water consumption. Data for the Swedish production has been used to represent these parameters in both countries. For parameters in the production that are different for the two countries (plaster-boards, transport distances etc.), averaging of data based on each country's proportion of the total production of Uni Wall was used.

Data quality:

Specific data for usage of energy and materials have been used for 96 % of the product's mass. Background data have been modelled with generic data from the Ecoinvent 3.5 database. The data is representative according to temporal, geographical and technological requirements. Background data are from 2003 or later, and updated within the last 3 years. For assessment of plasterboards the following EPD was used: NEPD-354-246-EN. Specific processes were assessed with average data for one year of production (principally year 2019).

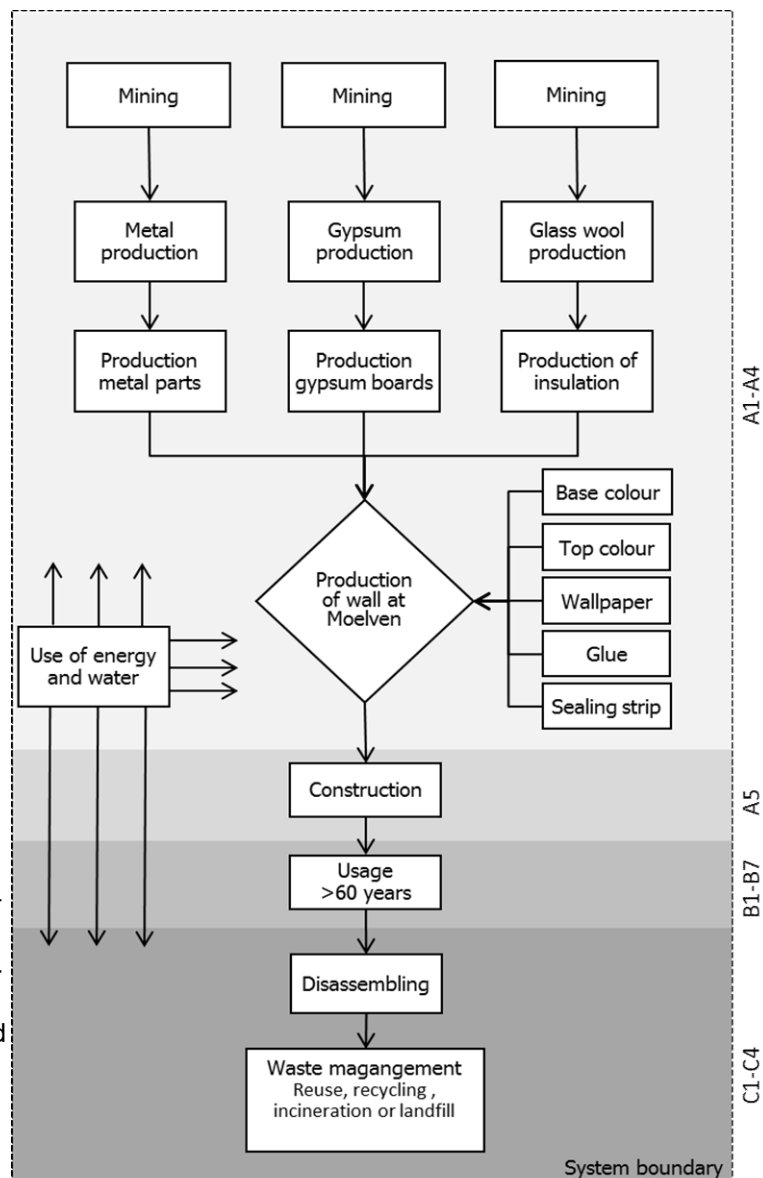

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel consumption
Lorry		Diesel, 16-32 ton, Euro4	293	0.09 l/tkm

The estimation of average distance between the production unit and construction site is based on actual distances between the production units and main cities within Sweden and Norway.

Assembly (A5)

The installation of the Uni Wall room partition system does not require any use of materials or energy. The walls are fitted and installed manually with the use of basic building tools. Usage of manual tools have not been included in this assessment. During the installation of the components, packagings are sorted and disposed of. The waste management of packagings is the only flow reported in module A5.

Installation in the building (A5)

The installation of the Uni Wall room partition system does not require any use of materials or energy. The walls are fitted and installed manually with the use of basic building tools. Usage of manual tools have not been included in this assessment. During the installation of the components, packagings are sorted and disposed of. The waste management of packagings is the only flow reported in module A5.

Use phase (B1-B7)

The usage of the Uni Wall room partition system does generally not entail any specific maintenance. Modules B1 and B5-B7 have been assessed as non-relevant as the Uni Wall does not require any materials or energy for usage or refurbishment. Modules B2-B4 have been excluded from the study due to uncertainties and inability to control how the product is managed by final user.

End of Life (C1, C3, C4)

Waste type	Unit	Value
Hazardous waste disposed	kg	7.1E-04
Collected as mixed construction waste	kg	4.1
Reuse	kg	-
Recycling	kg	5.2
Energy recovery	kg	0.4
To landfill	kg	1.0

Plasterboards with wallpaper are separated and the gypsum goes to recycling. The metal parts are also sorted out and recycled. The recyclable materials constitute approximately 94 % of the products weight. The remaining 6 % (dust and mixed waste) is delivered to an approved landfill or sent to incineration. The quantities presented in the table below include production spillage. The end of life scenario is based on a most likely scenario for Moelven Modus.

Transport to waste processing (C2)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel consumption
Waste collection lorry		Diesel, 21 ton	50	0.4 l/tkm

The distance to disposal site is assumed to be 50 km.

LCA: Results

The software used for modelling the life cycle and assesment of the environmental impacts is SimaPro 9.0. For calculation of environmental impacts the LCIA method CML-IA baseline was applied, with certain modification of characterisation factors according to EN 15804.

System boundaries (X=included, MND= module not declared, MNR=module not relevant)

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
x	x	x	x	x	MNR	MND	MND	MND	MNR	MNR	MNR	x	x	x	x	MND

Environmental impact

Parameter	Unit	A1	A2	A3	A4	A5	C2	C3	C4
GWP	kg CO ₂ -eqv	1.57E+01	1.52E+00	2.41E-01	9.64E-01	1.80E-02	1.81E-01	0.00E+00	2.69E-01
ODP	kg CFC11-eqv	1.28E-06	2.83E-07	1.32E-07	1.80E-07	3.37E-09	3.38E-08	0.00E+00	3.72E-08
POCP	kg C ₂ H ₄ -eqv	2.34E-03	2.49E-04	4.91E-05	1.58E-04	2.95E-06	2.96E-05	0.00E+00	6.29E-05
AP	kg SO ₂ -eqv	5.54E-02	5.91E-03	8.68E-04	3.74E-03	6.99E-05	7.01E-04	0.00E+00	2.09E-03
EP	kg PO ₄ ³⁻ -eqv	1.22E-02	1.36E-03	1.78E-04	8.58E-04	1.60E-05	1.61E-04	0.00E+00	1.18E-03
ADPM	kg Sb-eqv	1.32E-04	4.65E-06	5.94E-08	2.96E-06	5.53E-08	5.54E-07	0.00E+00	2.88E-07
ADPE	MJ	2.13E+02	2.30E+01	1.44E+00	1.46E+01	2.73E-01	2.74E+00	0.00E+00	2.69E+00

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

This EPD is representative for the Uni Wall partition system with two different types of coatings; glass-fibre fabric or vinyl wallpaper. The vinyl wallpaper has been used for the assessment of environmental impacts presented in this EPD. A separate assessment of the glass-fibre fabric has been conducted to ensure that the variance in environmental impact depending on choice of wall coating lies within recommended value. Results from the assessment show that, when comparing the life cycle of Uni Wall with the two types of coatings, the highest deviation within the considered environmental impact categories is 8,7 % (within the category chemical oxidation potential).

Resource use

Parameter	Unit	A1	A2	A3	A4	A5	C2	C3	C4
RPEE	MJ	8.60E+00	3.42E-01	8.24E+00	2.17E-01	4.07E-03	4.07E-02	0.00E+00	1.76E-01
RPEM	MJ	1.50E+01	0.00E+00	1.05E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
TPE	MJ	2.36E+01	3.42E-01	9.29E+00	2.17E-01	4.07E-03	4.07E-02	0.00E+00	1.76E-01
NRPE	MJ	2.35E+02	2.49E+01	4.62E+00	1.59E+01	2.97E-01	2.97E+00	0.00E+00	3.24E+00
NRPM	MJ	3.77E+00	0.00E+00	1.70E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
TRPE	MJ	2.39E+02	2.49E+01	6.32E+00	1.59E+01	2.97E-01	2.97E+00	0.00E+00	3.24E+00
SM	kg	1.70E+00	0.00E+00	8.70E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	1.57E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
W	m ³	0.00E+00	0.00E+00	5.48E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.07E-03

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

End of life - Waste

Parameter	Unit	A1	A2	A3	A4	A5	C2	C3	C4
HW	kg	7.54E-05	1.37E-05	9.56E-06	8.74E-06	1.63E-07	1.64E-06	0.00E+00	1.42E-05
NHW	kg	1.91E+00	1.12E+00	5.85E-03	7.10E-01	1.33E-02	1.33E-01	0.00E+00	1.88E-01
RW	kg	2.76E-04	1.61E-04	6.97E-06	1.03E-04	1.92E-06	1.92E-05	0.00E+00	1.81E-05

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

End of life - Output flow

Parameter	Unit	A1	A2	A3	A4	A5	C2	C3	C4
CR	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR	kg	1.04E+00	0.00E+00	4.75E-01	0.00E+00	8.00E-01	0.00E+00	2.87E+00	0.00E+00
MER	kg	1.92E-02	0.00E+00	5.20E-02	0.00E+00	3.00E-02	0.00E+00	2.96E-01	0.00E+00
EEE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

Additional Norwegian requirements

Greenhous gas emission from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing prosess(A3).

Data source	Amount	Unit
Electricity Mix, AC, consumption mix, at consumer, 230V, SE S, ELCD (2017)	0.045	kg CO ₂ -eqv/kWh
Electricity Mix, AC, consumption mix, at consumer, 230V, NO S, ELCD (2017)	0.029	kg CO ₂ -eqv/kWh

Dangerous substances

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list
- The product contains substances given by the REACH Candidate list or the Norwegian priority list that are less than 0,1 % by weight.
- The product contain dangerous substances, more then 0,1% by weight, given by the REACH Candidate List or the Norwegian Priority list, see table.
- The product contains no substances given by the REACH Candidate list or the Norwegian priority list. The product is classified as hazardous waste (Avfallsforskiten, Annex III), see table.

Indoor environment

The product meets the requirements for low emissions (M1) according to EN15251: 2007 Appendix E.





Report from performed emission test is presented in appendix 7 of the background report, LCA-report Sweco 2020-1.

Carbon footprint

Carbon footprint has not been worked out for the product.

Bibliography

ISO 14025:2010	<i>Environmental labels and declarations - Type III environmental declarations - Principles and procedures</i>
ISO 14044:2006	Environmental management - Life cycle assessment - Requirements and guidelines
EN 15804:2012	<i>Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products</i>
ISO 21930:2007	<i>Sustainability in building construction - Environmental declaration of building products</i>
PCR, Institut Bauen und Umwelt, 2019	<i>Product Category Rules for Building-Related Products and Services; Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the project report Part B: Requirements on the EPD for Room partition systems</i>
LCI/LCA Report	<i>Background report for Uni Wall 98 mm. Report number: LCA-report Sweco 2020-1</i>
ECHA, 2020	<i>ECHA: "Candidate List of Substances of Very High Concern for authorisation". Available at http://www.echa.europa.eu/web/guest/candidate-list-table Last update: 16 January 2020</i>
Norwegian Environment Agency, 2018	<i>List of Priority Substances Available at http://www.environment.no/List-of-Priority-Substances/ Updated: 15 January 2018</i>

 <p>epd-norge.no The Norwegian EPD Foundation</p>	<p>Program operator The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway</p>	<p>Phone: +47 97722020 e-mail: post@epd-norge.no web: www.epd-norge.no</p>
 <p>epd-norge.no The Norwegian EPD Foundation</p>	<p>Publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway</p>	<p>Phone: +47 97722020 e-mail: post@epd-norge.no web: www.epd-norge.no</p>
	<p>Owner of the declaration Moelven Modus AS Post Box 63 Asfaltvegen 1, 2051 Jessheim Norway</p>	<p>Phone: +47 06050 Fax: +47 63 97 04 87 e-mail: post.modus@moelven.no web: www.moelven.no</p>
	<p>Author of the Life Cycle Assessment Isak Eklöv & Andreas Asker Sweco Environment AB Vaksalagatan 10, 75320 Uppsala, Sweden</p>	<p>Phone: +46 73 619 54 92 Fax: e-mail: isak.eklov@sweco.se web: www.sweco.se</p>