

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Flügger 07 Wood Tex Matt:

Flügger 07 Wood Tex Matt White/ Base 1

Flügger 07 Wood Tex Matt Base 3

Flügger 07 Wood Tex Matt Base 4

Flügger 07 Wood Tex Matt Black

Flügger Group A/S



EPD registration number: S-P-05982, Date of publication: 2022.05.02, Date of validity: 2027.05.01, Geographical scope: Northern & Central Europe

GENERAL INFORMATION

MANUFACTURER INFORMATION

Manufacturer	Flügger Group A/S
Address	Islevdalvej 151, 2610 Rødovre, Denmark
Contact details	anpap@flugger.com
Website	https://www.flugger.com/

PRODUCT IDENTIFICATION

Product name	Flügger 07 Wood Tex Matt
Additional label(s)	Flügger 07 Wood Tex Matt White/ Base 1, Flügger 07 Wood Tex Matt Base 3, Flügger 07 Wood Tex Matt Base 4, Flügger 07 Wood Tex Matt Black
Product number / reference	-
Place(s) of production	Kolding Facility, Denmark
CPC code	3511- Paint and varnishes and related products

EPD INFORMATION

The EPD owner has the sole ownership, liability, and responsibility for the EPD. Construction products EPDs may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

EPD program operator	The International EPD System
EPD standards	This EPD is in accordance with EN 15804+A2 and ISO 14025 standards.
Product category rules	The CEN standard EN 15804 serves as the core PCR. In addition, the EPD International PCR 2019:2014 version 1.11 (2021-02-05) is used.
EPD author	Flügger Group A/S
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
Verification date	2022-04-28
EPD verifier	Hetal Parekh Udas
EPD number	S-P-05982
Publishing date	2022-05-02
EPD valid until	2027-05-01

PRODUCT INFORMATION

PRODUCT DESCRIPTION

The following products are covered by this EPD:

Flügger 07 Wood Tex Matt White/ Base 1, Flügger 07 Wood Tex Matt Base 3, Flügger 07 Wood Tex Base 4, Flügger 07 Wood Tex Black.

Flügger 07 Wood Tex Matt is a series of aqueous, matt, and full-covering products for wood protection. They give the wood a highly weather-resistant surface with maximum durability, gloss, and colour stability. The products are easy to apply and quick drying. All products inhibit mould and mildew growth on the surface.

PRODUCT APPLICATION

Flügger 07 Wood Tex Matt assortment can be applied on top of building structures such as eaves, gable cladding, and facades. In addition, can be applied on top of light types of wood, such as pine or spruce, pressure or vacuum-treated wood, and industrial primed wood. The substrate must be primed, industrially primed, or previously treated.

Flügger 07 Wood Tex Matt can be applied by brush, roller, or spray. If applying using a roller or spray, brush over afterwards. It is recommended to decide the corresponding tool depending on the finish. Apply wet on wet and finish by brushing in the same direction. Always use the same batch number on contiguous surfaces. Cold and heat can affect the viscosity of the material. Material temperature for spray painting should be min. 15°C. Condensation must not form. Cold and increased humidity extends

drying time, full curing, and re-treatment interval. Increased temperature and low atmospheric humidity reduce drying time and full curing. Always perform test treatments to check and accept the adhesion and results.

TECHNICAL SPECIFICATIONS

Product type: Wood protection, opaque

Use area: Exterior

Nominal spreading rate: 8 m²/liter

For more technical specifications information, please see the Technical Data Sheet for the declared product on <https://www.flugger.com/>

PHYSICAL PROPERTIES OF THE PRODUCT

Average physical properties for products covered by this EPD:

- Density: 1,17 (kg/liter)
- Solids Weight: 38 %
- Solids by volume: 31 %
- Gloss: Matte; 5

More information can be found in Flügger's website:

<https://www.flugger.com/>

PRODUCT STANDARDS

From the Flügger 07 Wood Tex Matt assortment, Flügger 07 Wood Tex Matt White/ Base 1 and Flügger 07 Wood Tex Matt Black contribute to Green Building Standard credits by meeting the following specific requirements:

- Nordic Swan Ecolabel (3097 0029)

ADDITIONAL TECHNICAL INFORMATION

For safety, health, and environmental conditions see the Safety Data Sheet for the declared products on <https://www.flugger.com/>.

MARKET

Scandinavia and Europe

REFERENCE SERVICE LIFE, PRODUCT

The reference service life of the product is highly dependent on the conditions of use. However, the expected durability is estimated to be equal to 15 years. The durability of the surface depends on the wood quality, structure, layer thickness, application, and exposure. The expected durability can therefore be shorter or longer than stated.

ESTIMATED SERVICE LIFE, OBJECT

The coated object is not declared.

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm). The product contains no substances given by the Norwegian priority list.

PRODUCT RAW MATERIAL COMPOSITION

Product and Packaging Material	Weight, kg	Post-consumer %	Renewable %	Country Region of origin
Water	0,25-0,30	-	-	Europe
Binder	0,45-0,50	-	-	Europe
Filler	0,10-0,15	-	-	Europe/USA
Pigment	<0,1	-	-	Europe
Solvent	<0,02	-	-	Europe
Additive	<0,06	-	-	Europe
Biocide	<0,02	-	-	Europe
Transportation packaging	0,005	-	-	Europe
Product packaging	0,043	50	-	Europe

PRODUCT LIFE-CYCLE

MANUFACTURING AND PACKAGING (A1-A3)

The manufacturing stage (A1-A3) consists of four main stages: premixing, dispersion, adjusting, and filling. The first stage is premixing where pigments, extenders, binders, additives, and solvents are weighted and mixed. The next stage is the dispersion process where the pigments and extenders are grinded, embedded in binders, and stabilized. In the adjusting stage, the coating mixture is adjusted by adding more solvent/water or additives to adjust colour, viscosity, gloss, etc. to meet specifications.

The last two steps include the filling of the product into cans and loading it to pallets. The paint is filled in cans of various sizes in filling machines and then loaded to pallets. The full pallets are moved to a warehouse within the site. Eventually, the paint is moved out and transported to the construction site.

TRANSPORT AND INSTALLATION (A4-A5)

The transportation and installation stages (A4-A5) analyse the impacts that occurred during the transportation of the products to the construction site, as well as the impacts generated during the application of the product.

The transportation impacts were calculated for 1 kg of paint, with a final destination being a construction site in Oslo, and the transportation method is assumed to be a lorry.

The paint is applied to a wooden exterior surface. Paint wastes in this EPD assume a commercial painting scenario and are based on values measured by Flügger's professional product support team. Packages and transportation packaging are handled as waste and are transported to the closest disposal facilities. Transportation distance to the closest incineration facilities is assumed to be 80 km, while the transportation distance to recycling facilities is assumed to be equal to 50 km. The transportation method is assumed as lorry.

PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not include the product use and maintenance stage (B1-B7). Therefore, environmental impacts related to this stage have not been studied.

Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)

The end-of-life stage analyses the impacts related to the disposal of remnant paint on a surface when that surface reaches the end of its service life. The consumption of energy and natural resources is considered negligible for disassembling of the end-of-life product. Therefore, the impacts of demolition are assumed zero (C1).

Module (C2) includes the transportation of the waste paint to the closest disposal facilities. All end-of-life product is assumed to be

sent to the closest disposal facilities, assuming a transportation distance equal to 50 km.


The heating value of the dried paint film is assumed negligible so the paint going to incineration is considered in final disposal Module (C3).

Module (C4) is the disposal of end-of-life paint, which in this case is assumed that 70% of the paint is incinerated and the remaining 30% is landfilled.

Module (D) includes the potential loads and benefits from recycling and incinerating packaging products at the end-of-life.

LIFE CYCLE STAGES DIAGRAM

The diagram below illustrates the system boundaries for the analysis according to the module principle EN 15804+A2. The analysis is carried out from cradle-to-gate with options, including the modules (A1-A3, A4, A5, C1, C2, C3, C4, D).

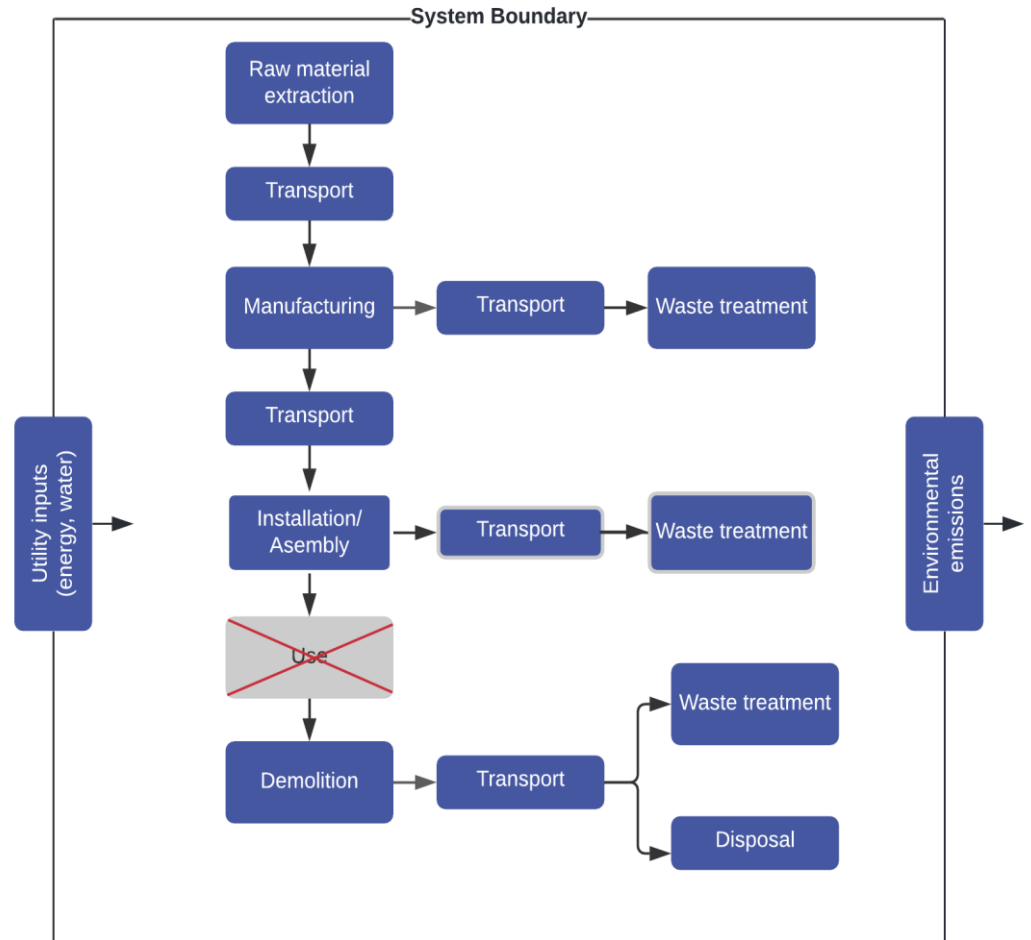

LIFE-CYCLE ASSESSMENT

LIFE-CYCLE ASSESSMENT INFORMATION

Period for data 2021

DECLARED AND FUNCTIONAL UNIT

Declared unit 1 kg

Mass per declared unit 1 kg

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C 0

Biogenic carbon content in packaging, kg C 0,0015

SYSTEM BOUNDARY

This EPD covers the cradle to gate with options scope with following modules; A1 (Raw material supply), A2 (Transport) and A3 (Manufacturing), A4 (Transport), A5 (Assembly) as well as C1 (Deconstruction), C2 (Transport at end-of-life), C3 (Waste processing) and C4 (Disposal). In addition, module D - benefits and loads beyond the system boundary is included.

Product stage		Assembly stage			Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	D	D
x	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x	x	x
Geography , by two-letter ISO country code or regions. The International EPD System only.																		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction / Demolition	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the EN 15804:2012+A2:2019 and the applied EPD International PCR. The study does not exclude any hazardous materials or substances.

The study includes all major raw materials and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

All major raw materials and essential energy is included. The cut-off criteria do not apply to hazardous materials and substances. Therefore, 100% of the total product content is included and

detailed analysed. The life cycle analysis includes all industrial processes from raw material acquisition to production, distribution, and end-of-life stages. The production of capital equipment, construction activities, infrastructure, maintenance, and personnel-related, and administration activities are excluded.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation.

In this study, as per EN 15804, allocation is conducted in the following order.

1. Allocation should be avoided.
2. Allocation should be based on physical properties (e.g., mass, volume) when the difference in revenue is small.
3. Allocation should be based on economic values.

As it is impossible to collect data separately for each product produced in the plant, data such as incoming energy, water, and waste production in-house is primarily allocated among all products through volume allocation. The recycling process and transportation of the material are allocated to this analysis. No co-product allocation is relevant for paints.

This LCA study is conducted in accordance with all methodological considerations, such as performance, system boundaries, data quality, allocation procedures, and decision rules to evaluate inputs and outputs.

All estimations and assumptions taken into account are presented below:

Module A4

The transportation distance is defined according to PCR 2019:14 Construction Products. The transportation distance was calculated by estimating the distance that needs to be covered from Flügger's production plant in Kolding, Denmark to Flügger's main warehouse in Bollebygd, Sweden (537 km), and then to Oslo, Norway (338 km) and to the final construction site assuming an average transportation distance equal to (30 km). The transportation method is assumed to be a lorry. Transportation does not cause losses as products are packaged accordingly. The volume capacity utilization factor is assumed to be 1 for the packaged products.

Module A5

The installation stage at the construction site includes unwrapping of the plastic buckets and application of the paint on top of the surface with a roller or brush. The consumption of energy and natural resources is negligible for the assembly stage. The application losses assume a commercial painting scenario and are equal to 3,6 %. The value was measured by Flügger's professional product support team. Packages and transportation packaging are handled as waste and assumed to be sorted and sent to the closest disposal facilities such as recycling, incineration, and landfill. Transportation distance to the closest incineration facilities is assumed to be 80 km, while the transportation distance to recycling facilities is assumed to be equal to 50 km. The transportation method is assumed as lorry.

Module C1: Since the consumption of energy and natural resources is negligible for disassembling of the end-of-life product, the impacts of demolition are assumed zero.

Module C2: It is estimated that the product loses some of its mass as the solvents of the paint evaporate during its use. In this study is assumed that all solvents and biocides in the paint have been released during the use stage. All the end-of-life product is assumed to be sent to the closest disposal facilities. The transportation distance is assumed to be 50 km and the transportation method is assumed as lorry.

Module C3: The heating value of dried paint is assumed negligible so the paint going to incineration is considered in final disposal (C4).

Module C4: Paint waste is gathered as part of another product, in this case, a wood substrate, and is generally not separated from it at the end of life. The typical disposal scenario for paint applied on a wood substrate is the same as for the wooden construction waste (CEPE, 2018). More specifically, based on a study regarding the deconstruction of wood-framed houses contacted by (Diyamandoglu and Fortuna, 2015), it was estimated that approximately 70% of the lumber waste is recycled. In this case, as the dried film paint is not currently recycled, it is assumed that all of it goes for incineration (CEPE, 2018). In addition, the remaining 30% of the paint is assumed to be landfilled.

AVERAGES AND VARIABILITY

GWP-GHG varies with the amount of pigment present in the paint. More specifically, pigments provide the colour and opacity of the paint, as well as some of its physical properties. One of the most common pigments is titanium dioxide (TiO₂) which is used as a white pigment. It is widely accepted that the impact of titanium dioxide dominates for all paints, with a concentration of 10% or greater (Kougoulis, J.S., et al., 2012).

In this study, the differences are spotted for Flügger 07 Wood Tex Matt Base 3 and Flügger 07 Wood Tex Matt Base 4, as these paints have titanium dioxide concentrations equal to or less than 3%. More specifically, Flügger 07 Wood Tex Matt Base 3 has titanium dioxide concentration ranging between 0,02 - 0,04 kg, while Flügger 07 Wood Tex Matt Base 4 does not include any pigment in its formula composition.

In this analysis, since the amount of pigment present in both bases is considered to be noticeably small, the pigments of the tinting paste are considered to be under cut-off criteria, as the emissions and the impact will be the same regardless of whichever colour the customer chooses.

The International EPD System additional data requirements. Variability for GWP-GHG for A1-A3.

Supply-chain specific data for GWP-GHG	> 90 %
Variation in GWP-GHG between products	+22%, -19%
Variation in GWP-GHG between sites	-

ENVIRONMENTAL IMPACT DATA

Note: additional environmental impact data may be presented in annexes.

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total	kg CO ₂ e	1,3E0	8,86E-2	1,95E-1	1,59E0	8,68E-2	2,55E-1	MND	MND	MND	MND	MND	MND	MND	0E0	4,64E-3	4,99E-2	1,21E0	2,48E-2
GWP – fossil	kg CO ₂ e	1,3E0	8,85E-2	1,69E-1	1,55E0	8,76E-2	2,48E-1	MND	MND	MND	MND	MND	MND	MND	0E0	4,64E-3	4,98E-2	1,21E0	1,34E-2
GWP – biogenic	kg CO ₂ e	7,63E-3	5,06E-5	2,59E-2	3,36E-2	6,65E-5	6,94E-3	MND	MND	MND	MND	MND	MND	MND	0E0	2,84E-6	5,81E-5	6,69E-5	1,14E-2
GWP – LULUC	kg CO ₂ e	7,46E-4	3,43E-5	1,03E-4	8,82E-4	2,75E-5	3,38E-5	MND	MND	MND	MND	MND	MND	MND	0E0	1,73E-6	1,22E-6	3,36E-6	-2,58E-5
Ozone depletion pot.	kg CFC-11e	1,85E-7	2,05E-8	9,84E-9	2,15E-7	2,15E-8	8,26E-9	MND	MND	MND	MND	MND	MND	MND	0E0	1,08E-9	1,41E-9	1,8E-9	-5,85E-9
Acidification potential	mol H ⁺ e	1,42E-2	3,84E-4	7,97E-4	1,54E-2	2,82E-4	5,77E-4	MND	MND	MND	MND	MND	MND	MND	0E0	1,4E-5	3,52E-5	1,24E-4	-7E-5
EP-freshwater ²⁾	kg Pe	6,84E-4	7,79E-7	7,06E-6	6,92E-4	7,44E-7	2,5E-5	MND	MND	MND	MND	MND	MND	MND	0E0	4,18E-8	5,96E-8	1,77E-7	-1,11E-6
EP-marine	kg Ne	1,42E-3	8,38E-5	1,33E-4	1,63E-3	6,2E-5	7,24E-5	MND	MND	MND	MND	MND	MND	MND	0E0	2,86E-6	1,31E-5	5,32E-5	-1,41E-5
EP-terrestrial	mol Ne	1,21E-2	9,33E-4	1,48E-3	1,46E-2	6,89E-4	6,64E-4	MND	MND	MND	MND	MND	MND	MND	0E0	3,19E-5	1,45E-4	5,88E-4	-1,8E-4
POCP (“smog”)	kg NMVOCe	4,7E-3	3,17E-4	4,59E-4	5,48E-3	2,71E-4	2,33E-4	MND	MND	MND	MND	MND	MND	MND	0E0	1,24E-5	5,19E-5	1,53E-4	-5,27E-5
ADP-minerals & metals	kg Sbe	1,46E-4	2,32E-6	1,08E-6	1,49E-4	1,56E-6	5,42E-6	MND	MND	MND	MND	MND	MND	MND	0E0	1,25E-7	3,47E-8	1,25E-7	-5,81E-8
ADP-fossil resources	MJ	2,66E1	1,36E0	3,63E0	3,16E1	1,42E0	1,16E0	MND	MND	MND	MND	MND	MND	MND	0E0	7,2E-2	1,06E-1	1,55E-1	-7,44E-1
Water use ³⁾	m ³ e depr.	1,06E0	4,81E-3	9,26E-2	1,16E0	5,29E-3	4,59E-2	MND	MND	MND	MND	MND	MND	MND	0E0	2,58E-4	5,64E-4	2,69E-3	-2,69E-3

1) GWP = Global Warming Potential; EP = Eutrophication potential; POCP = Photochemical ozone formation; ADP = Abiotic depletion potential. 2) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator. 3) Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	5,56E-8	6,09E-9	4,01E-9	6,56E-8	7,69E-9	2,65E-9	MND	MND	MND	MND	MND	MND	MND	0E0	3,27E-10	7,56E-10	1,21E-9	-2,93E-10
Ionizing radiation ³⁾	kBq U235e	5,02E-2	5,95E-3	2,36E-2	7,98E-2	6,22E-3	2,46E-3	MND	MND	MND	MND	MND	MND	MND	0E0	3,15E-4	5,64E-4	4,23E-4	-9,78E-4
Ecotoxicity (freshwater)	CTUe	2,47E1	1,07E0	1,75E0	2,75E1	1,09E0	1,24E0	MND	MND	MND	MND	MND	MND	MND	0E0	5,67E-2	7,23E-2	3,61E-1	-2,5E-1
Human toxicity, cancer	CTUh	1,2E-8	3,16E-11	6,54E-11	1,21E-8	2,74E-11	5,54E-10	MND	MND	MND	MND	MND	MND	MND	0E0	1,61E-12	5,35E-12	1,53E-9	-4,29E-12
Human tox. non-cancer	CTUh	1,16E-7	1,16E-9	1,41E-9	1,18E-7	1,24E-9	4,98E-9	MND	MND	MND	MND	MND	MND	MND	0E0	6,23E-11	6,24E-11	4,69E-9	-7,86E-11
SQP	-	1,95E0	1,41E0	1,66E-1	3,53E0	2,15E0	1,73E-1	MND	MND	MND	MND	MND	MND	MND	0E0	7,74E-2	3,68E-1	2,29E-1	-1,8E-2

4) SQP = Land use related impacts/soil quality.5) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy	MJ	1,31E0	1,96E-2	2,19E-1	1,55E0	1,79E-2	6,4E-2	MND	MND	MND	MND	MND	MND	MND	0E0	1,05E-3	6,94E-3	3,79E-3	-1,79E-1
Renew. PER as material	MJ	0E0	0E0	5,33E-2	5,33E-2	0E0	1,93E-3	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	-7,54E-2
Total use of renew. PER	MJ	1,31E0	1,96E-2	2,72E-1	1,6E0	1,79E-2	6,59E-2	MND	MND	MND	MND	MND	MND	MND	0E0	1,05E-3	6,94E-3	3,79E-3	-2,55E-1
Non-re. PER as energy	MJ	2,08E1	1,36E0	2,48E0	2,47E1	1,42E0	9,15E-1	MND	MND	MND	MND	MND	MND	MND	0E0	7,2E-2	1,06E-1	1,55E-1	-7,44E-1
Non-re. PER as material	MJ	5E-1	0E0	1,15E0	1,65E0	0E0	5,93E-2	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Total use of non-re. PER	MJ	2,13E1	1,36E0	3,63E0	2,63E1	1,42E0	9,74E-1	MND	MND	MND	MND	MND	MND	MND	0E0	7,2E-2	1,06E-1	1,55E-1	-7,44E-1
Secondary materials	kg	1,43E-2	0E0	2,08E-2	3,51E-2	0E0	1,26E-3	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Renew. secondary fuels	MJ	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Non-ren. secondary fuels	MJ	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Use of net fresh water	m ³	1,35E-2	2,53E-4	1,47E-3	1,52E-2	2,96E-4	7,36E-4	MND	MND	MND	MND	MND	MND	MND	0E0	1,36E-5	1,13E-4	3,86E-4	-5,91E-5

6) PER = Primary energy resources

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1,06E-1	1,46E-3	8,08E-3	1,15E-1	1,38E-3	6,8E-3	MND	MND	MND	MND	MND	MND	MND	0E0	7,66E-5	0E0	1,56E-2	-8,38E-4
Non-hazardous waste	kg	1,83E0	1,12E-1	3,34E-1	2,28E0	1,53E-1	1,62E-1	MND	MND	MND	MND	MND	MND	MND	0E0	6,11E-3	0E0	6,94E-1	-1,79E-2
Radioactive waste	kg	4,25E-5	9,31E-6	1,26E-5	6,44E-5	9,77E-6	2,29E-6	MND	MND	MND	MND	MND	MND	MND	0E0	4,91E-7	0E0	5,99E-7	-7,97E-7

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Materials for recycling	kg	0E0	0E0	9,6E-3	9,6E-3	0E0	8,87E-3	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Materials for energy rec	kg	0E0	0E0	3,14E-2	3,14E-2	0E0	9,24E-2	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Exported energy	MJ	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0

ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG	kg CO ₂ e	1,3E0	8,85E-2	1,69E-1	1,55E0	8,76E-2	2,48E-1	MND	MND	MND	MND	MND	MND	MND	0E0	4,64E-3	4,98E-2	1,21E0	1,34E-2

8) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013) This indicator is almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

SCENARIO DOCUMENTATION

Manufacturing energy scenario documentation

Scenario parameter	Value
Electricity data source and quality	Electricity, Denmark, residual mix, Ecoinvent 3.6, year: 2019
Electricity CO2e / kWh	0,63
District heating data source and quality	District heating, Denmark, Ecoinvent 3.6, year: 2018
District heating CO2e / kWh	0.0809

BIBLIOGRAPHY

CEPE, PEFCR Decorative Paints, Version 1.0, 2018

Diyamandoglu, V., Fortuna, L.M., 2015. Deconstruction of wood-framed houses: Material recovery and environmental impact 100, 21–30.

ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations. Principles and procedures.

ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.

ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines.

Ecoinvent database v3.6 (2019) and One Click LCA database.

EN 15804:2012+A2:2019 Sustainability in construction works – Environmental product declarations – Core rules for the product category of construction products.

EPD. General Programme Instructions of the international EPD® system. Version 4.0

Flügger 07 Wood Tex Matt Average LCA background report 17.03.2022

Kougoulis, J.S., et al., 2012. Revision of EU European ecolabel and development of EU green public procurement criteria for indoor and outdoor paints and varnishes. Green Public Procurement Background Report, European Commission, Joint Research Centre (JRC).

ABOUT THE MANUFACTURER

Flügger is an international group based in the Nordic region that develops, produces, markets, and sells a wide range of building paints, wood stains, fillers, wallpapers, and accessories. The philosophy of Flügger is to make products and solutions that enable painters and consumers to deliver sustainable, beautiful, and high-quality painting results in an efficient way.

Flügger's passion for paint and good craftsmanship, as well as respect for the environment is deeply anchored in its history, which spans several centuries and roots dating back to 1783.

EPD AUTHOR AND CONTRIBUTORS

Manufacturer	Flügger Group A/S
EPD author	Flügger Group A/S
EPD verifier	Hetal Parekh Udas
EPD program operator	The International EPD® System
Background data EPD-034	This EPD is based on Ecoinvent 3.6 (cut-off), CEPE database v3.0, and One Click LCA databases.
LCA software	The LCA and EPD have been created using One Click LCA Pre-Verified EPD Generator for Paints, Coatings, Sealants and Adhesives

VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with EN 15804, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The background report (project report) for this EPD

VERIFICATION OVERVIEW

Following independent third party has verified this specific EPD:

EPD verification information	Answer
Independent EPD verifier	Hetal Parekh Udas
EPD verification started on	2022-04-14
EPD verification completed on	2022-04-28
Supply-chain specific data %	> 90 %
Approver of the EPD verifier	The International EPD® System, Technical Committee, supported by the Secretariat

Author & tool verification	Answer
EPD author	Flügger Group A/S
EPD author training completion	2022-01-18
EPD Generator module	Paints, Coatings, Sealants and Adhesives
Independent software	Ugo Pretato, Studio Fieschi & soci Srl.
Software verification date	2021-05-11

THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of

- the data collected and used in the LCA calculations,
- the way the LCA-based calculations have been carried out,
- the presentation of environmental data in the EPD, and
- other additional environmental information, as present

with respect to the procedural and methodological requirements in ISO 14025:2010 and EN 15804:2012+A2:2019.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Signature



VERIFICATION AND REGISTRATION (ENVIRONDEC)

ISO standard ISO 21930 and CEN standard EN 15804 serves as the core Product Category Rules (PCR)	
PCR	PCR 2019:14 Construction products, version 1.11
PCR review was conducted by:	The Technical Committee of the International EPD® System. See www.environdec.com/TC for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact .
Independent third-party verification of the declaration and data, according to ISO 14025:2006:	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
Third party verifier	Hetal Parekh Udas
	Approved by: The International EPD® System Technical Committee, supported by the Secretariat
Procedure for follow-up during EPD validity involves third party verifier	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no



THE INTERNATIONAL EPD® SYSTEM

EPD International AB, Box 210 60, SE-100 31 Stockholm, Sweden, E-mail: info@environdec.com

ANNEX 1 : ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	1,25E0	8,77E-2	1,65E-1	1,5E0	8,68E-2	2,46E-1	MND	MND	MND	MND	MND	MND	MND	0E0	4,6E-3	3,53E-2	1,21E0	1,46E-2
Ozone depletion Pot.	kg CFC ₁₁ e	1,65E-4	1,63E-8	9,2E-9	1,65E-4	1,71E-8	5,94E-6	MND	MND	MND	MND	MND	MND	MND	0E0	8,59E-10	1,14E-9	1,54E-9	-4,48E-9
Acidification	kg SO ₂ e	1,47E-2	2,79E-4	6,69E-4	1,56E-2	1,86E-4	5,76E-4	MND	MND	MND	MND	MND	MND	MND	0E0	9,68E-6	1,11E-5	8,19E-5	-5,58E-5
Eutrophication	kg PO ₄ ³ e	2,23E-3	4,85E-5	2,86E-4	2,56E-3	3,76E-5	1,1E-4	MND	MND	MND	MND	MND	MND	MND	0E0	2,03E-6	1,68E-3	9,33E-4	-2,86E-5
POCP ("smog")	kg C ₂ H ₄ e	1,04E-3	1,31E-5	3,67E-5	1,09E-3	1,07E-5	3,97E-5	MND	MND	MND	MND	MND	MND	MND	0E0	5,7E-7	7,23E-6	5,86E-6	-3,99E-6
ADP-elements	kg Sbe	1,46E-4	2,32E-6	1,08E-6	1,49E-4	1,56E-6	5,42E-6	MND	MND	MND	MND	MND	MND	MND	0E0	1,25E-7	3,47E-8	1,25E-7	-5,81E-8
ADP-fossil	MJ	2,66E1	1,36E0	3,63E0	3,16E1	1,42E0	1,16E0	MND	MND	MND	MND	MND	MND	MND	0E0	7,2E-2	1,06E-1	1,55E-1	-7,44E-1

ANNEX 2 : ENVIRONMENTAL IMPACT INDICATOR- GWP-GHG- THE INTERNATIONAL EPD SYSTEM FOR FLÜGGER 07 WOOD TEX MATT WHITE AND FLÜGGER 07 WOOD TEX MATT BASE 4

ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM FOR FLÜGGER 07 WOOD TEX MATT WHITE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG	kg CO ₂ e	1,64E0	9,73E-2	1,56E-1	1,89E0	8,69E-2	2,52E-1	MND	MND	MND	MND	MND	MND	MND	0E0	5E-3	5,37E-2	1,31E0	1,24E-2

ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM FOR FLÜGGER 07 WOOD TEX MATT BASE 4

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG	kg CO ₂ e	9,86E-1	8,76E-2	1,79E-1	1,25E0	8,82E-2	2,44E-1	MND	MND	MND	MND	MND	MND	MND	0E0	4,34E-3	4,66E-2	1,13E0	1,41E-2

ANNEX 3 : ADDITIONAL NORWEGIAN REQUIREMENTS

Greenhouse gas emissions from the use of electricity in the manufacturing phase

Electricity Mix	Value	Unit
Electricity, Denmark, residual mix	0,63	kg CO ₂ eq/ kWh

Content of dangerous substances

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list.
- The product contains substances that are less than 0.1% by weight given by the REACH Candidate or the Norwegian priority list.
- The product contains dangerous substances more than 0.1% by weight given in the REACH Candidate list or the Norwegian Priority list, concentrations is given in the EPD:

Dangerous substances from the REACH candidate list or the Norwegian Priority List	CAS No.	Quantity (concentration, wt %/FU(DU)).
Substance 1		
Substance n		

Transportation from production to a construction site

Scenario parameter	Value
Type	Lorry
Type of vehicle	>32t, EURO 6
Capacity utilisation (%)	100
Fuel/ Energy consumption (kg/tkm)	0,0192
Global warming potential (Kg CO2 eq/tkm)	0,0863
Distance (km)	537 km (Kolding, Denmark -Bollebygd, Sweden) 338 km (Bollebygd, Sweden – Oslo, Norway) 30 km (Construction site in Norway)

Indoor environment

Not applicable. Product is intended for outdoor use.

Appendix II

Self-declaration from EPD owner, specific Norwegian requirements

1 Applied electricity data set used in the manufacturing phase

The electricity mix for the electricity used in manufacturing (A3) is the electricity grid mix

0,63 kg CO₂ eq/kWh

2 Content of dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

- The product contains substances that are less than 0.1% by weight given by the REACH Candidate or the Norwegian priority list.
- The product contains dangerous substances more than 0.1% by weight given in the REACH candidate list or the Norwegian Priority List, concentrations is given in the EPD:

Dangerous substances from the REACH candidate list or the Norwegian Priority List	CAS No.	Quantity (concentration, wt%/FU(DU)).
Substance 1		
Substance n		

3 Transport from the place of manufacture to a central warehouse

Transport distance, and CO₂-eqv./DU from transport of the product from factory gate to central warehouse in Oslo shall be given. The following table shall be included in the EPD:

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy use	Unit	Kg CO ₂ -eqv./tkm
Truck	100	Lorry, Europe, EURO6	537 km (Kolding, Denmark to Bollebygd Sweden) 338 km (Bollebygd, Sweden to Oslo, Norway) 30 km (Construction site in Norway)	0,0192	kg/tkm	0,0863

4 Impact on the indoor environment

X Not relevant.

Products are intended for outdoor use.